

Features

- Eight volt-free relay outputs
- Up to 50m range
- Powered from 120/240VAC or 12/24VDC
- Output relays rated at 16A@240VAC
- LEDs for power and output activity
- Robust case sealed to IP65

Compatibility

- Fully compatible with all Cape 200 series transmitters.

Programming

- All systems are designed and produced in-house, allowing us to provide a custom-programmed solution to your exact requirements. This includes features such as custom output relay formats and timed outputs.


Applications

- Machinery control
- Hoist control
- Winch control
- Conveyor control

Transmitters



Chargers

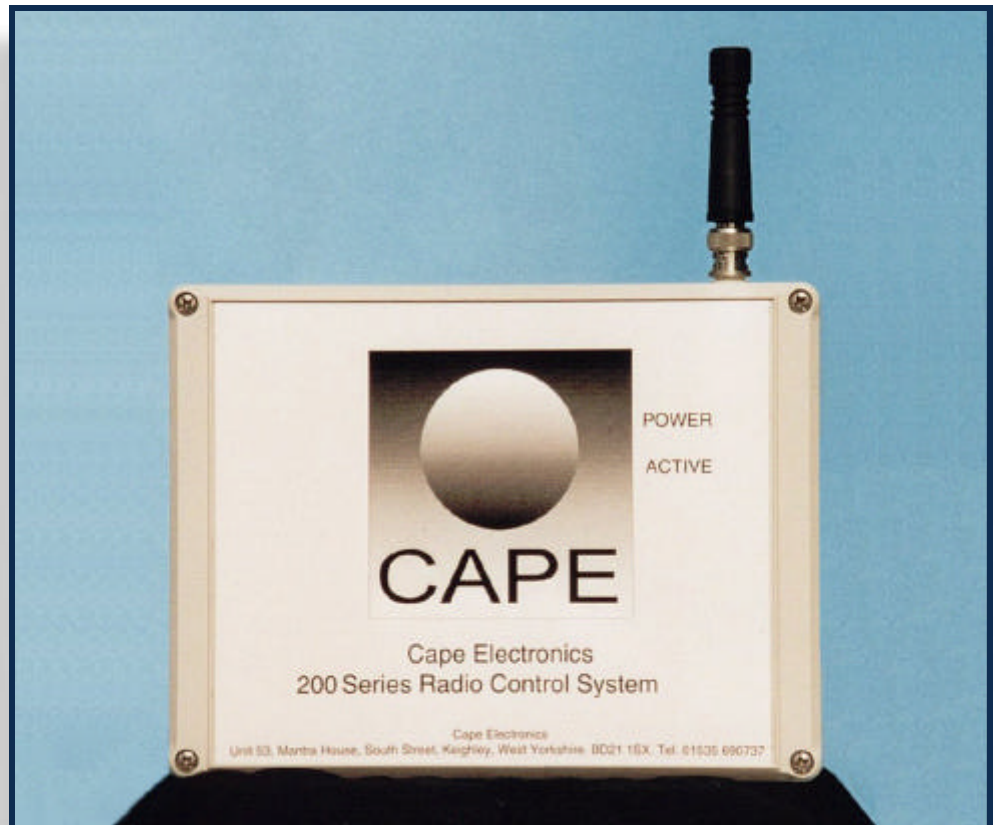

FEATURES

The type 200 receiver provides a highly effective solution for more advanced remote control applications. Suitable for electric hoists, multiple door systems, lighting and winch controls, this system allows the user to specify the behaviour of the output relays, allowing momentary, timed or latched outputs to be used. The receiver features eight output relays and identity code and other options set by means of internal DIL switches.

Specifications for Cape 200 Series Receiver

Relay Outputs	8 relays rated at 16A @ 120/240V AC and 30V DC
Power Supply	120/240V AC 50/60Hz (switchable), 12V DC & 24V DC
Frequencies / Modes	418 / 433MHz WBFM and 434 / 458 / 868MHz NBFM
Enclosure	ABS enclosure sealed to IP65 - Grey RAL7035

Specifications are subject to constant improvement and may be subject to change without notification.