

135 Roller Door Controller

Features

- Three volt-free relay outputs
- Up to 50m range - adjustable
- Powered from 120/240VAC or 12/24VDC
- Output relays rated at 16A@240VAC
- Internal / external antenna
- Robust case sealed to IP65
- Very simple to install

Compatibility

- Fully compatible with all Cape 100 series transmitters.


Programming

- All systems are designed and produced in-house, allowing us to provide a custom-programmed solution to your exact requirements. This includes features such as custom output relay formats and timed outputs.

Applications

- Roller door control
- Lighting control
- Electric gate control

Transmitters

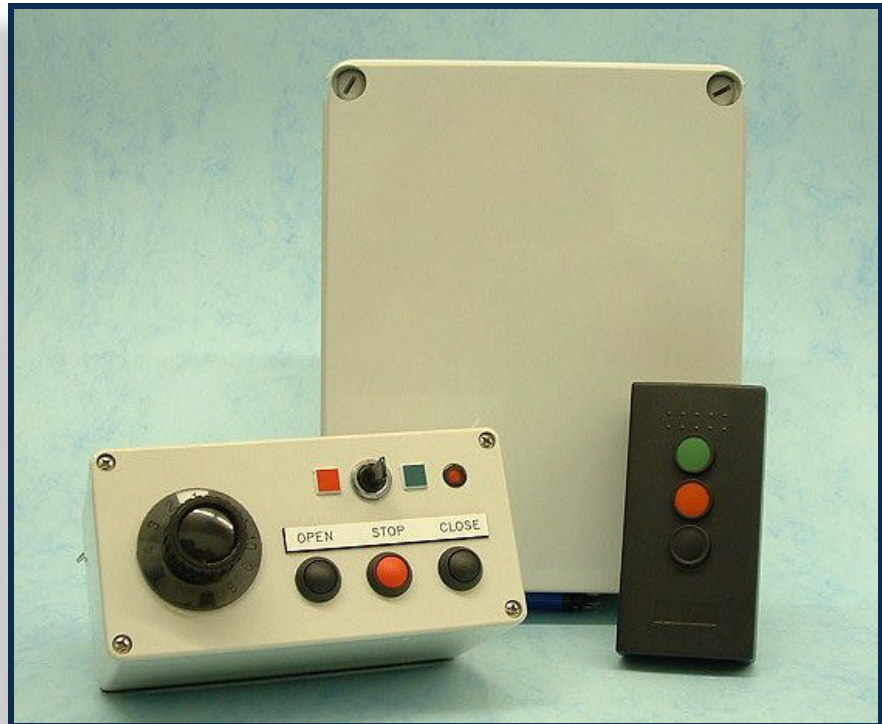

FEATURES

The 135 series radio control system brings the convenience and safety of radio remote control within the reach of all users of electrically powered roller shutter doors. The system features outputs for open, stop and close functions, allowing the system to exactly mimic the manual pushbuttons normally fitted to electric roller doors. The transmitter units are available with two or three pushbuttons for single door use, in addition to multi-door vehicle mounted transmitter units, which can be programmed to operate up to twelve separate doors on larger sites. Above all, the 135 Series gives your operator the familiarity of manual controls with the safety and improved environmental control of high quality radio control.

Specifications for Cape 135 Series Receiver

Relay Outputs	3 relays rated at 16A @ 120/240V AC and 30V DC
Power Supply	120/240V AC 50/60Hz, 12V DC & 24V DC
Frequencies / Modes	433MHz AM
Enclosure	Receiver enclosure sealed to IP65 - Grey RAL7035

Specifications are subject to constant improvement and may be subject to change without notification.

Cape Electronics

Unit 59, Mantra House, South Street, Keighley, West Yorkshire BD21 1SX Phone: 01535 690737 Fax: 01535 690737
email: enquiries@capeelectronics.co.uk